

# A-Series Furniture

## Assembly Instructions

### Desk Assembly

CALSTONE INC - 160712

#### Component Parts:


- 1 - Desk Top
- 2 - Desk Legs (interchangeable - left or right)
- 1 - Back Panel

#### Hardware:

- #10 x 5/8" Combination Screws
- #10-24 1/2 Machine Screws
- Hex Bolts and Washers

#### Desk Assembly:

1. Place desk top on floor, with threaded top inserts facing up (laminated side down).
2. Place desk legs onto top and align all holes. NOTE: legs are interchangeable - left or right. If a cut-back leg is being used, determine whether the cut-back leg is required on the left or right hand side of the desk.
3. Insert hex bolts with washers through each hole on leg mounting plate into the threaded inserts of the top. DO NOT TIGHTEN.
4. Line up the holes on the sides of back panel to the holes on the inner side of the legs. Insert metal black screws and tighten.
5. Tighten all bolts on both legs
6. Secure back panel to top with wood screws provided
7. Flip table right side up and level with glides
8. If required, connect desks with joiner plates provided using wood combination screws

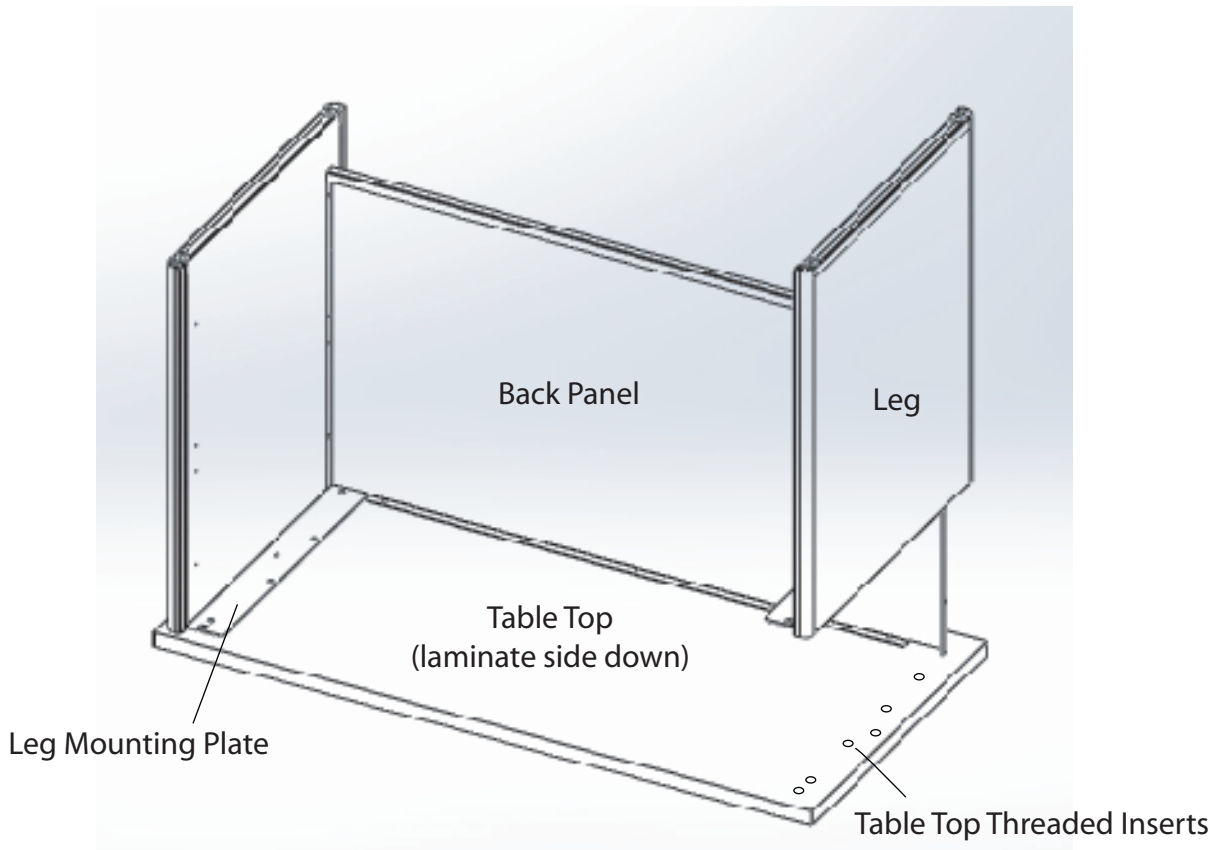

\*Do not discard packaging material until all contents are located\*